



30 mm Digital Measuring Probe

A new Orbit[®] Digital Probe

- ▶ Full calibration over 30 mm
- ▶ Accurate **absolute** sensor an alternative to incremental encoders
- ▶ No position loss or overspeed issues
- ▶ Excellent resolution and repeatability
- ▶ **Use to check:** Deep holes, mechanical deformation, machined parts.
- ▶ **Markets for use:** Automotive, Aerospace
Automotive Glass, Machine tools

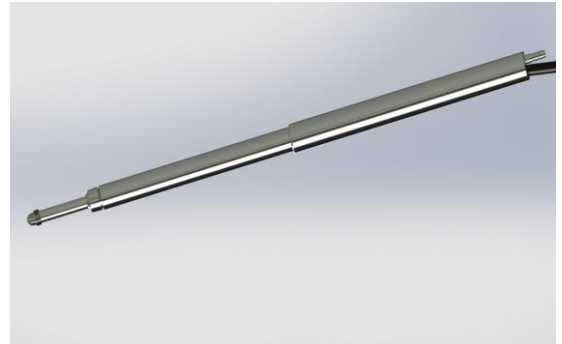

Example: Use DT/30/P to measure deep blind holes

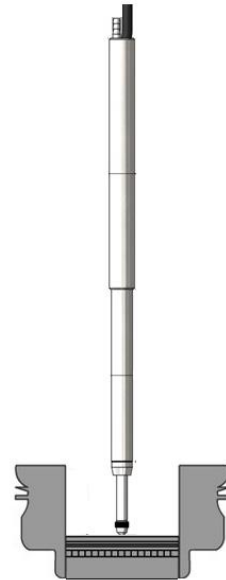


- ▶ **Pneumatic Operation Max Operating Pressure 2.0bar**
- ▶ **Tested to > 10million Cycles**
- ▶ **0.15% Linearity R.E.**
- ▶ **Non Repeat 0.25 Microns**
- ▶ **Stepped Diameter Body 8mm diameter over Bearing Area, 9.52 at back.**
- ▶ **Tip force at Mid Position 0.85N @ 1 bar**

Precision. Quality. Reliability


www.solartronmetrology.com • sales.solartronmetrology@ametec.com

Applications

X-Y positioning

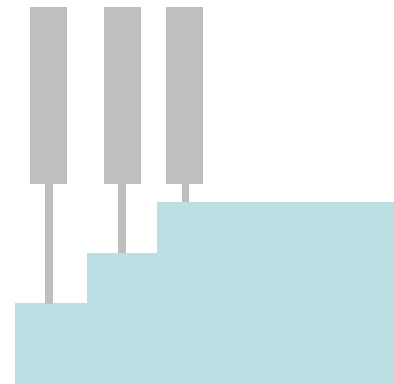

Height of feature checks




Depth of features

- ▶ Higher accuracy replacement for potentiometer based measuring probes with no wearing parts.
- ▶ Can replace conventional LVDT type displacement sensors providing higher accuracy




High speed positioning with ATM module to provide a TTL output for a PLC that can never loose count

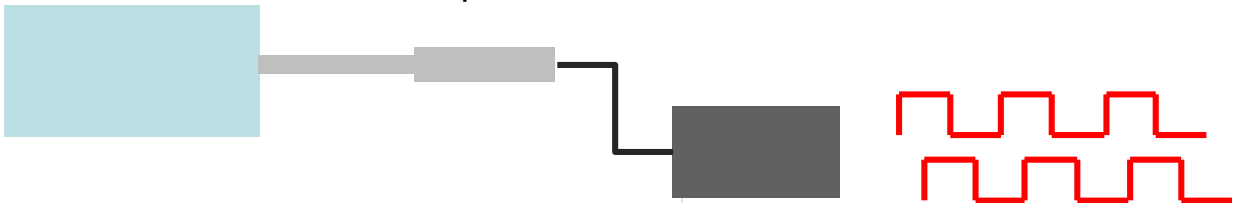

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametek.com

Dimensions – DT30

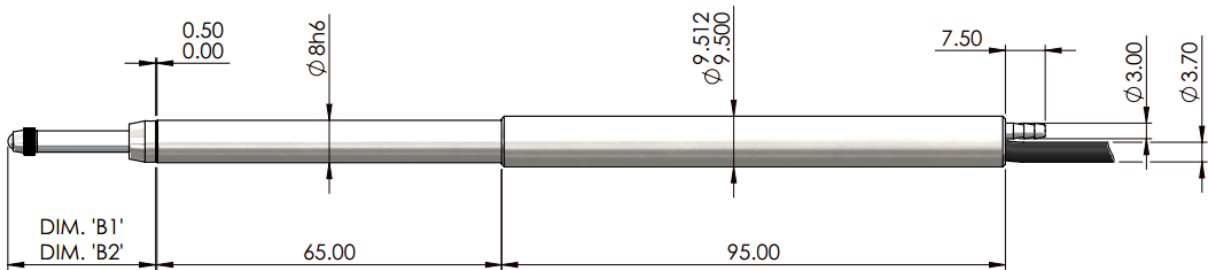

MEASUREMENT RANGE	30mm
FULLY EXTENDED DIM 'B1'	43.00
PRE-TRAVEL	0.15
POST-TRAVEL	0.85
FULLY RETRACTED DIM 'B2'	12.00

Solartron advise checking of dimensions prior to use by downloading drawings from website or contact sales office for latest issue

Specification – DT30

Product	
Pneumatic Axial Cable	DT/30/P
Body Width (mm)	8 mm and 9.5 mm
Measurement Performance	
Measurement Range (mm)	30
Accuracy (% of Reading) (Note 1)	0.15
Repeatability (µm) (Note 2)	0.25
Resolution (µm)	0.02
Pre Travel (mm)	0.15
Post Travel (mm)	0.85
Tip Force at Middle of Range (N) Pneumatic ±30% at 1 bar (Note 3)	0.85
Environmental	
Sealing	IP50
Sealing for Probe Interface Electronics	IP43 for Module and TCON
Storage Temperature (°C)	-20 to +80
Probe Operating Temperature (°C)	+5 to +80
Electronics Operating Temperature (°C)	0 to +60
EMC Emissions	EN61000-6-3
EMC Immunity	EN61000-6-2
Shock	Do not subject to excessive shocks or loads
Life (Note 4)	Greater than 10 million cycles depending on application
Material	
Probe Body	Stainless Steel
Tips	Nyon, Ruby, Tungsten Carbide, Silicon Nitride
Gaiter	N/A
Cable	PUR Standard
Electronics Module	ABS
Electronics Interface	
Orbit®3 Interface Options	USB, RS232, Ethernet, Modbus, Ethernet I/P, Bluetooth
Reading Rate	3906 readings per second
Bandwidth of Electronics (Hz) user selectable	460, 230, 115, 58, 29, 14, 7,4
Power	5±0.25 VDC @ 0.06A typical

Note 1: Accuracy 0.5 µm or % reading (whichever greater)

Note 2: Repeated operation against a carbide target with side load applied to the bearing using max-min

Note 3: Maximum operating pressure 2 bar. To maximise working life ensure that the air supply is clean and dry - see product manual 503094 Section 4 for further details.

Note 4: See product manual 503094 Section 5 for advice on how to maximise life

Sales Offices

UK (Headquarters and Factory)

Solartron Metrology
Bognor Regis, West Sussex, PO22 9ST
Tel: +44 (0) 1243 833 333
Fax: +44 (0) 1243 833 332
Email: sales.solartronmetrology@ametek.com

France

AMETEK SAS
Solartron Metrology Division
Elancourt, 78990 France
Tel: +33 (0) 1 30 68 89 50
Fax: +33 (0) 1 30 68 89 99
Email: info.solartronmetrology@ametek.fr

Germany

AMETEK GmbH
Solartron Metrology Division
40670 Meerbusch
Tel: +49 (0) 2159 9136 500
Fax: +49 (0) 2159 9136 505
Email: vertrieb.solartron@ametek.de

Brazil

AMETEK do Brasil, Ltda
Rod. Eng Ermenio de Oliveira Penteadou, Km 57, SP75
Bairro Tombadouro
13337-300, Indaiatuba, SP, Brasil
Tel: +55 19 2107 4126

China

AMETEK Commercial Enterprise (Shanghai)
Co., Ltd
Shanghai, 200131, China
Tel: +86 21 5763 2509
Email: china.solartronmetrology@ametek.com

North America

Solartron Metrology
USA Central Sales Office
Gastonia, NC 28054
Tel: +1 800 873 5838
Email: usasales.solartronmetrology@ametek.com

India

Contact Solartron Metrology UK
Tel: +44 (0) 1243 833 333
Fax: +44 (0) 1243 833 332

Distributors

Solartron have 30+ distributors worldwide, see website www.solartronmetrology.com for your nearest distributor

Precision Driven...

In the laboratory, on the shop floor or in the field, Solartron Metrology's products provide precise linear measurements for quality control, test and measurement and machine control. Solartron Metrology is a world leader in the innovation, design and manufacture of precision digital and analogue dimensional LVDT gauging probes, displacement sensors, optical linear encoders and associated instrumentation.



Solartron Metrology pursues a policy of continuous development. Specifications in this document may therefore be changed without notice.